


Nominal Flow: 5 m³/h
Performance Curve

Outlet Size: 1½"
2900 rpm

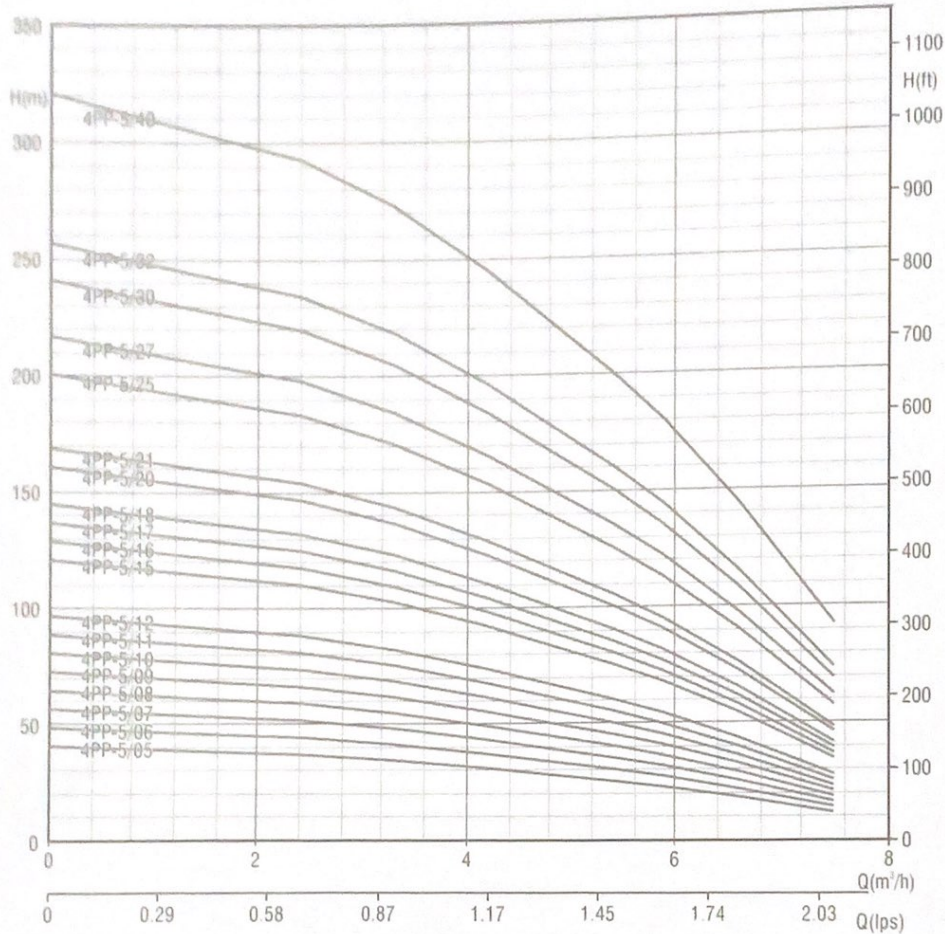

| Model | Motor Power | | Q(m ³ /h) Q(lps) | 0 | 2.4 | 3.3 | 4.2 | 5.4 | 5.8 | 6.6 | 7.5 |
|----------|-------------|-----|--------------------------------|-----|------|------|------|-----|------|------|------|
| | kW | HP | | 0 | 0.67 | 0.92 | 1.17 | 1.5 | 1.63 | 1.83 | 2.08 |
| 4PP-5/05 | 0.75 | 1 | Head(m) | 40 | 37 | 34 | 31 | 25 | 23 | 18 | 12 |
| 4PP-5/06 | 0.75 | 1 | | 48 | 44 | 41 | 37 | 30 | 27 | 22 | 14 |
| 4PP-5/07 | 1.1 | 1.5 | | 56 | 51 | 48 | 43 | 35 | 32 | 25 | 16 |
| 4PP-5/08 | 1.1 | 1.5 | | 64 | 58 | 54 | 49 | 40 | 36 | 29 | 18 |
| 4PP-5/09 | 1.1 | 1.5 | | 72 | 66 | 61 | 55 | 45 | 41 | 32 | 21 |
| 4PP-5/10 | 1.5 | 2 | | 80 | 73 | 68 | 61 | 50 | 45 | 36 | 23 |
| 4PP-5/11 | 1.5 | 2 | | 88 | 80 | 75 | 67 | 55 | 50 | 40 | 25 |
| 4PP-5/12 | 1.5 | 2 | | 96 | 88 | 82 | 73 | 60 | 54 | 43 | 28 |
| 4PP-5/15 | 2.2 | 3 | | 120 | 110 | 102 | 92 | 75 | 68 | 54 | 35 |
| 4PP-5/16 | 2.2 | 3 | | 128 | 117 | 109 | 98 | 80 | 72 | 58 | 37 |
| 4PP-5/17 | 2.2 | 3 | | 136 | 124 | 116 | 104 | 85 | 77 | 61 | 39 |
| 4PP-5/18 | 2.2 | 3 | | 144 | 131 | 122 | 110 | 90 | 81 | 65 | 41 |
| 4PP-5/20 | 3 | 4 | | 160 | 146 | 136 | 122 | 100 | 90 | 72 | 46 |
| 4PP-5/21 | 3 | 4 | | 168 | 153 | 143 | 128 | 105 | 95 | 76 | 48 |
| 4PP-5/25 | 3.7 | 5 | | 200 | 183 | 170 | 153 | 125 | 113 | 90 | 58 |
| 4PP-5/27 | 3.7 | 5 | | 216 | 197 | 184 | 165 | 135 | 122 | 97 | 62 |
| 4PP-5/30 | 4.5 | 6 | 240 | 219 | 204 | 183 | 150 | 135 | 108 | 69 | |
| 4PP-5/32 | 4.5 | 6 | 256 | 234 | 218 | 195 | 160 | 144 | 115 | 74 | |
| 4PP-5/40 | 5.5 | 7.5 | 320 | 292 | 272 | 244 | 200 | 180 | 144 | 92 | |

In view of continuous improvements in our design and process, the information, dimensions and specifications given herein are subject to change without notice